



**HAL**  
open science

# Thermomechanical Simulation of PET Stretch/Blow Molding

Fabrice Schmidt, Jean-François Agassant, Michel Bellet, Luc Desoutter

► **To cite this version:**

Fabrice Schmidt, Jean-François Agassant, Michel Bellet, Luc Desoutter. Thermomechanical Simulation of PET Stretch/Blow Molding. 10th International Conference of Polymer Processing Society, Apr 1994, Akron, United States. <hal-02053547>

**HAL Id: hal-02053547**

**<https://imt-mines-albi.hal.science/hal-02053547v1>**

Submitted on 14 Mar 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire HAL, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

## THERMOMECHANICAL SIMULATION OF PET STRETCH/BLOW MOLDING

F. M. SCHMIDT<sup>1</sup>, J. F. AGASSANT<sup>1</sup>, M. BELLET<sup>1</sup>, L. DESOUTTER<sup>2</sup>

<sup>1</sup> Ecole des mines de Paris, CEMEF - URA CNRS n° 1374, 06904 Sophia-Antipolis (FRANCE); <sup>2</sup> SIDEL Corporation, 76600 Le Havre (FRANCE)

In the stretch-blow molding process of Poly(Ethylene Terephthalate) bottles, a tube-shaped preform is heated above the glass transition temperature and then inflated with plug assistance to obtain desired bottle shape.

The performance of PET bottles produced by the stretch/blow molding process is determined both by operating conditions and by material properties (1).

The initial temperature of the preform is generally non uniform. Important temperature gradients arise during the inflation process at the contact point between the plug and the parison and along the neck of the bottle.

An incremental finite element technique based upon a volume approach is used to describe the inflation process.

At each time step a decoupled technique is used to solve mass and force balance equations and the differential viscoelastic constitutive equation (2). A thermal balance equation taking into account viscous dissipation as well as heat transfer with the mold wall and the surrounding air is then solved.

A careful remeshing procedure as well as time step adaptivity are introduced.

Fig. 1 shows intermediate shapes from the initial preform to the final bottle which were obtained using the Oldroyd B constitutive equation. On the right-hand side we have nonisothermal calculations, and on the left-hand part isothermal calculations. In Fig. 2, the influence of thermal effects on the stretching force is shown. In Fig. 3, temperature distribution is shown at the bottom of the bottle.

### REFERENCES

---

(1) Schmidt F. M., Agassant J. F., Bellet M. and Denis G., "Numerical Simulation of Polyester Stretch/Blow Molding Process", Numiform 92, Proc. 4th Int. Conf. on Numerical Methods in Industrial Forming Processes, Balkema, pp. 383-388, September 1992

(2) Schmidt F. M., Agassant J. F., Bellet M. and Denis G., "Viscoelastic Simulation of PET Stretch/Blow Molding", PPS Annual Meeting, Manchester (1993)

Fig. 1 Intermediate bottle shapes

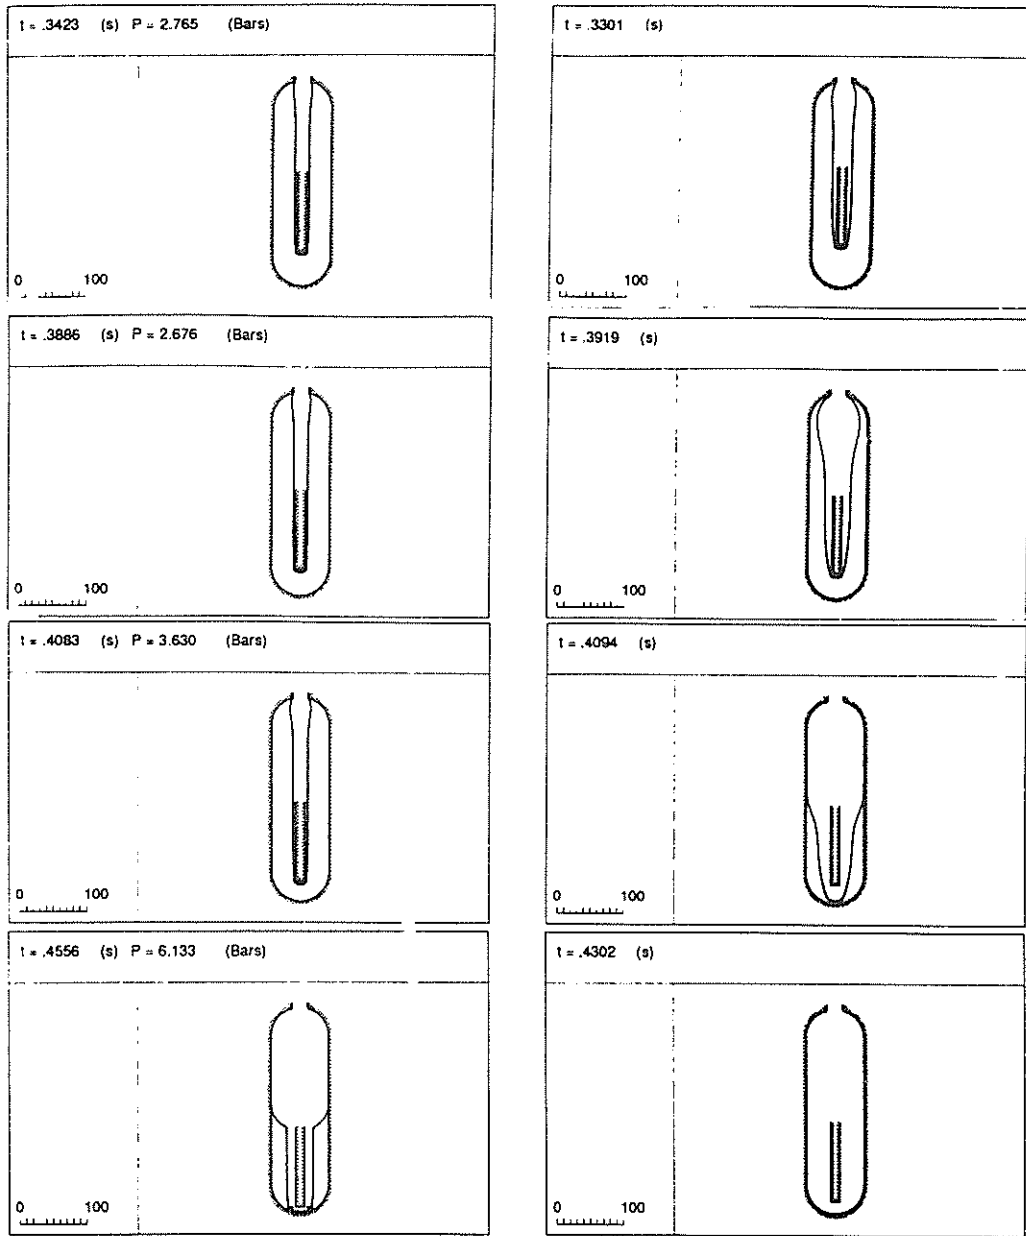


Fig. 2 - Stretching Force Versus Time

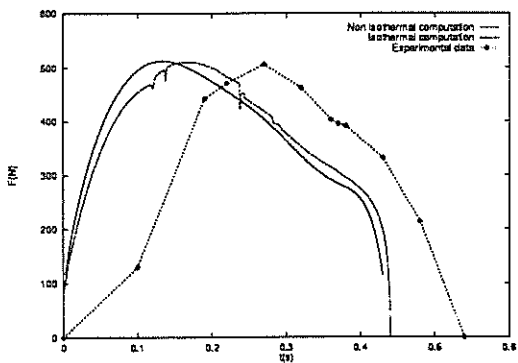


Fig. 3 Temperature distribution

